



## PolySto CleanRock® kerbs

### Next-generation CleanRock® kerbs

CleanRock® is PolySto's engineered core material for hygienic kerbs, developed to **deliver long-term wall protection** in demanding food-processing environments. Manufactured from a high-performance composite of polyester resins, quartz granules and additives, CleanRock® kerbs combine very **high impact resistance** with a non-porous, water-tight structure.

CleanRock® kerbs are supplied as a modular, prefabricated system. The range includes matching internal and external corners, as well as door end pieces. As standard, CleanRock® kerbs are delivered in a natural finish. A SaniCoat finish for exceptional chemical resistance is available on request. SaniCoat is a factory-applied protective coating that further enhances surface smoothness and cleanability.

- **SUSTAINABLE**  
New composition with recycled fiberglass material for an eco-friendly solution.
- **DURABLE**  
Built to last — 10x stronger than concrete.
- **LIGHTWEIGHT**  
Slim, easy to handle for faster installation.
- **QUICK TO INSTALL**  
Modular and prefabricated system.
- **EASY TO CLEAN**  
Food-safe design to wash away dirt quickly from walls.

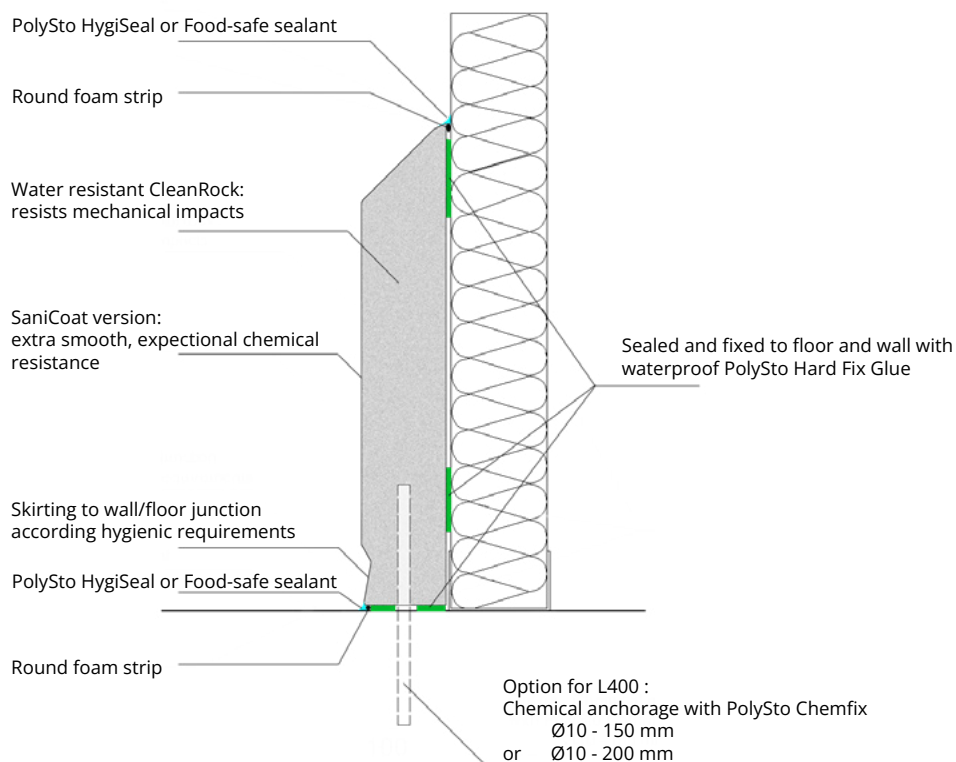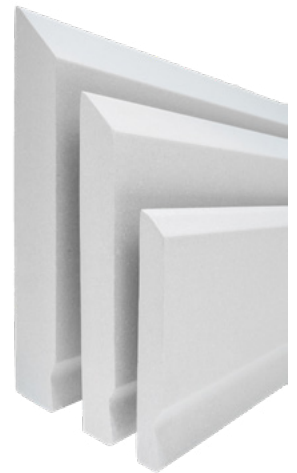


**S200**



**IMPACT LEVEL 2**

Light manual traffic, such as trolleys, with loads up to 200 Kg.

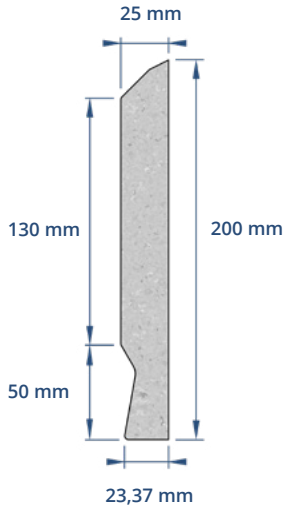

**Technical info**



	<b>Kerb</b>	<b>Internal corner</b>	<b>External corner</b>	<b>End piece right / left</b>
Length	1.000 mm	2 x 500 mm	970 mm	1.000 mm
Height	200 mm	200 mm	200 mm	200 mm
Thickness	25 mm	25 mm	25 mm	25 mm
Weight	10 kg	2 x 4,6 kg	8,9 kg	9,1 kg
Amount / pallet	60 pcs	60 pcs (sets)	60 pcs	60 pcs
Pallet size	120 x 80 x 70cmH	120 x 80 x 70cmH	120 x 80 x 70cmH	120 x 80 x 70cmH
Pallet weight	± 625 kg	± 580 kg	± 560 kg	± 575 kg
Temperature resistance	-35°C - +85°C (long exposure)			

**Average consumption of**


Food-safe Sealant or HygiSeal white or RAL9002	240 cc / meter
Hard Fix Glue	300 cc / meter

**Installation m/day (8h) with 1 installer**



Food-safe Sealant	40 meter
HygiSeal	30 meter

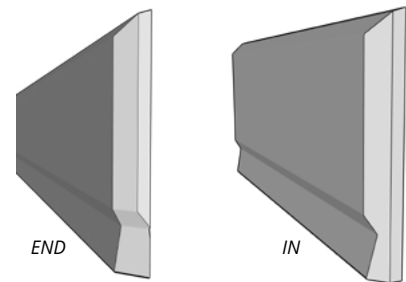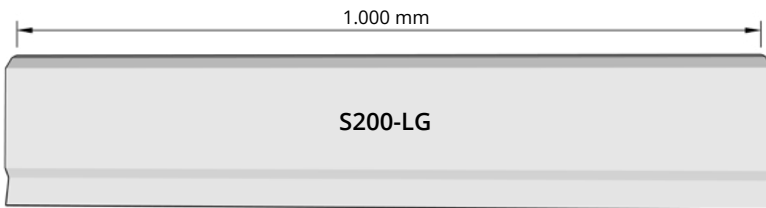


difference between END and IN

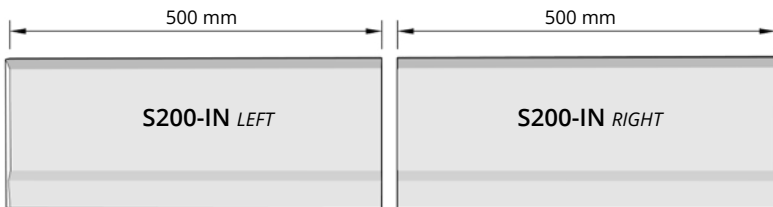

Internal corners are always supplied in sets.

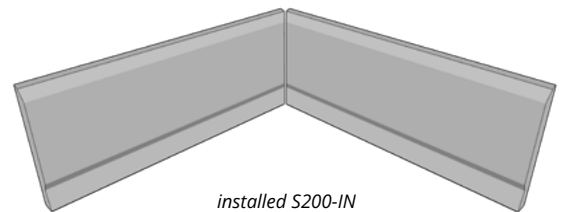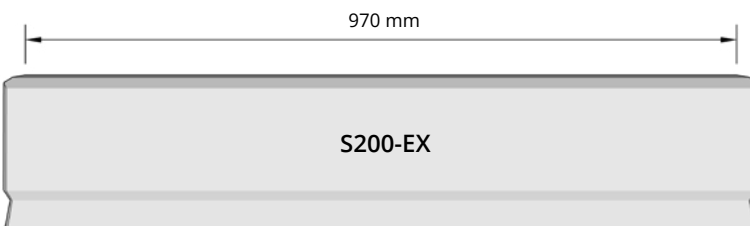

installed S200-IN



installed S200-EX

## Description

CleanRock® is the **patented core material** used in PolySto kerbs. The composition has been developed based on more than 30 years of experience in the food processing industry.

**Prefabricated** CleanRock® kerbs are composed of a mixture of polyester resins, quartz granulates and additives. The unique composition allows to prevent contaminations with Salmonella and Listeria. **CleanRock®** contains recycled FRP (CleanSheet) from our own production process, contributing to additional structural strength. CleanRock is ideal for food safe environments that have to comply with HACCP, EU, USDA, GFSI (Global Food Safety Standard Initiative), BRC and other food safety standards



**Food safe**



**Chemical resistant**



**Water resistant**




**Damage resistant**




**Strong**

## Properties


### No water absorption

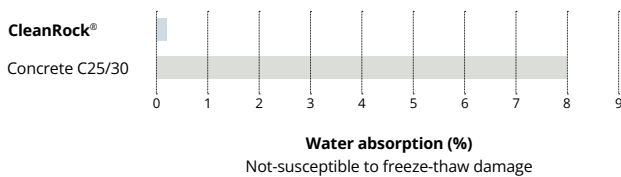


### 10x stronger than concrete

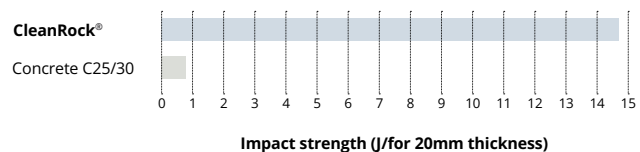

### Flexural strength (MPa)

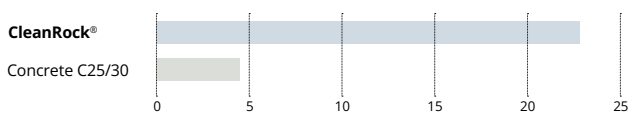

### Compressive strength (MPa)



Essential characteristics	Performance	Conform
Water absorption	0,2 %	NBN B15-215
Impact strength	14,7 J	EN 14617-9
Flexural strength	22,83 MPa	EN 196-1
Compressive strength	110,24 Mpa	EN 196-1
Volumetric mass	2.050 kg/m <sup>3</sup>	
Fire behavior	B,s2-d0	

High chemical resistance

The product design complies with EHEDG guidelines.

